This **SCREEN WINCH SYSTEM** is a particular lift that enables to lower until 7 mt. electrical screens from 300 cm. to 450 cm. of width.
The Screen Winch is supplied with a manual switch but can be also ordered with an external multichannel RF remote control.
It is supplied with six brackets: three for fixing the winch to the ceiling and three for mounting the screen to the beam.
A cable coiler, to be fixed to the ceiling behind the screen winch, is included; its purpose is to supply power to the electrical projection screen.
A **SAFETY DEVICE** is built-in in order to offer maximum security in case of any failure of the mechanism.

Optional: Sloping ceiling brackets (p. 67)

TECHNICAL SPECIFICATIONS

- Motor
  - · Power: ***50 Nm***
  - · Speed: ***11 rpm***
  - · Power supply: ***230V / 50 Hz***
  - · Consumo: ***255 W***
  - · Certification: ***IMQ***
- Roll down speed of Screen Winch System: 19 sec./metre
- Two strong steel cables diametre: 3 mm. – Breaking test load: 350 kg. for each cable
- Screen Winch housing dimensions: 2060x200x170 mm. (WxDxH)
- Beam dimensions: 45x90 mm. (DxH) – Length of the beam is approximately the same of the length of the projection screen housing
- Net weight of the Screen Winch System: kg. 40
- Maximum load that can be hung to the beam: kg. 36
- Safety device and cable coiler included
- On the Screen Winch can be only mounted MAJOR screens from 300 cm. up to 450 cm. of width.

- Screen Winch System plus screen housing in closed position: minimum height 52 cm.

Ceiling mounting bracket

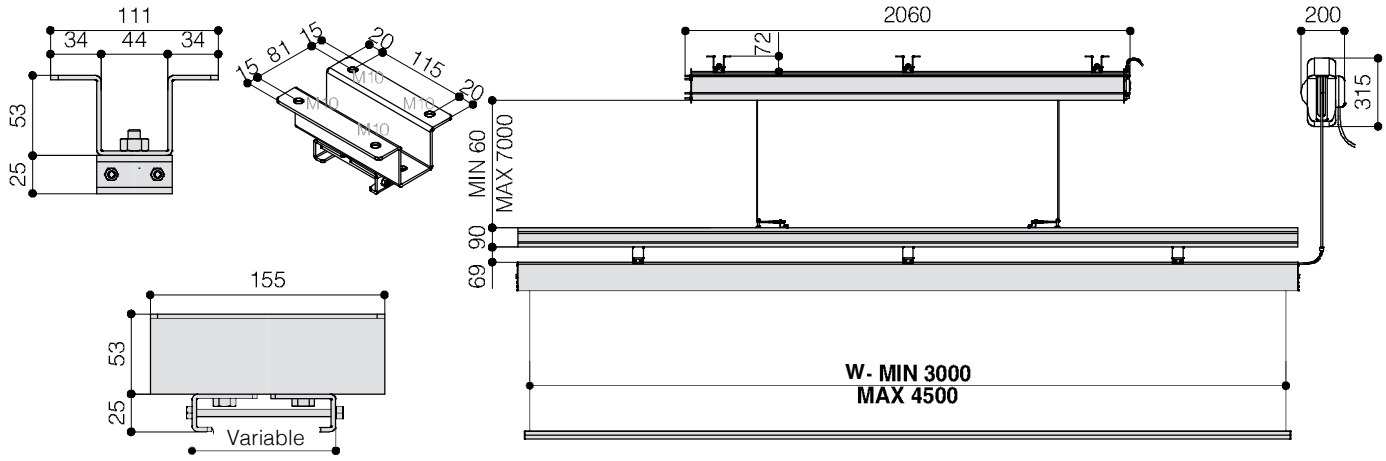

The measures in the drawings are expressed in millimetres.

Warranty: 24 months